

“ *Generate power from your waste heat* ”

Founded in 2009, ENOGIA is a turbine based ORC manufacturer specialised in waste heat recovery with systems producing from 10 kWe to 180 kWe.

THE PRODUCT

The ENO-40LT module is an ORC manufactured by ENOGIA, able to recover up to 640 kWth and having a nominal power output of 40 kWe from low temperature heat sources.



2 high speed **patented micro-turbines**



Hydraulic connections with **standard flanges**



Remote control and access **24/7**



Assembling and performance testing in ENOGIA workshop



Plug-and-play system on a single skid



A SYSTEM COMBINING PERFORMANCE AND RELIABILITY

Designed with the same state of mind as the other ORC of the LT range, the ENO- 40LT is a turnkey product featuring ENOGIA's best technology.

This system suits a wide range of heat recovery applications such as biomass boilers, gas engines, geo- thermal sources, or industrial processes. Any heat flow with temperatures between 70°C and

120°C can be recovered with this system thanks to its two kinetic turbines.

The produced power is monitored by decoupling protection relays, ensuring its compliance with the grid.


The remaining heat can be recovered for floor heating or drying system to reach a global efficiency close to 95%.

ENO-40LT CHARACTERISTICS

Electrical ratings	Maximum gross electric power	40 kWe
	Grid connection	400V, 3ph, 50-60 Hz
Heat source	Temperature range	70-120°C*
	Thermal power input range	450-640 kWth
	Hot source medium	Water, steam, oil
	Hydraulic connections	DN 80, PN 16
Cold source	Temperature range	0-55°C
	Working fluid	Water
	Cooling system	Dry cooler, cooling tower
	Hydraulic connections	DN 100, PN 16
Main components	Working fluid	R1233zd
	Generator	High speed, permanent magnet
	Expander	Kinetic turbine
	Heat exchangers	Brazed plate
	Pump	Multi-stage magnetic coupling
	Controls	Industrial PLC
	Monitoring	Remote web support
Main ratings	Weight	1650 kg
	Dimensions L x w x h	1,9 m x 1,2 m x 1,9 m
	Environmental	IP 20
	Noise level @10m	60 dB
	Design lifetime	20 yrs
	Safety	Non flammable, non toxic, ODP=0
Norm compliance	Machine directive	2006/42/EG
	PED	2014/68/EU
	Electrical norms	2014/35/EG
	Norm compliance	VDE-0126 (G59, VDE-ARN, UL, etc.)

* possibility to have >120°C with ORC MT

DIMENSIONS

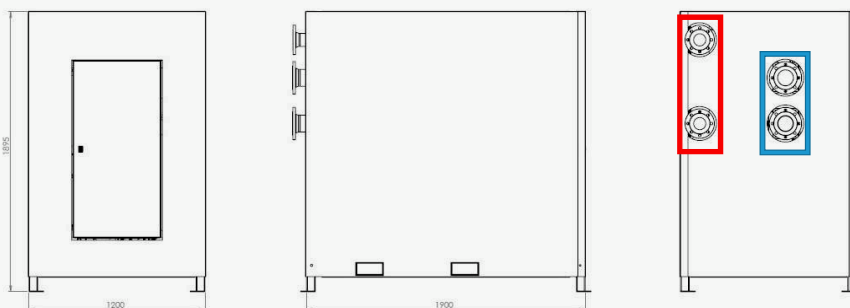

GOOD TO KNOW

This equipment should be installed as close as possible to the heat source to reduce heat losses through the pipes.